


# PRISCILLA

ULTRA LOW PROJECTION LED SURFACE MOUNTED LUMINAIRE  
FOR BEHAVIORAL HEALTH APPLICATIONS

# alva



Priscilla 19 with Island Breeze (IB) resin shade, ESN trim

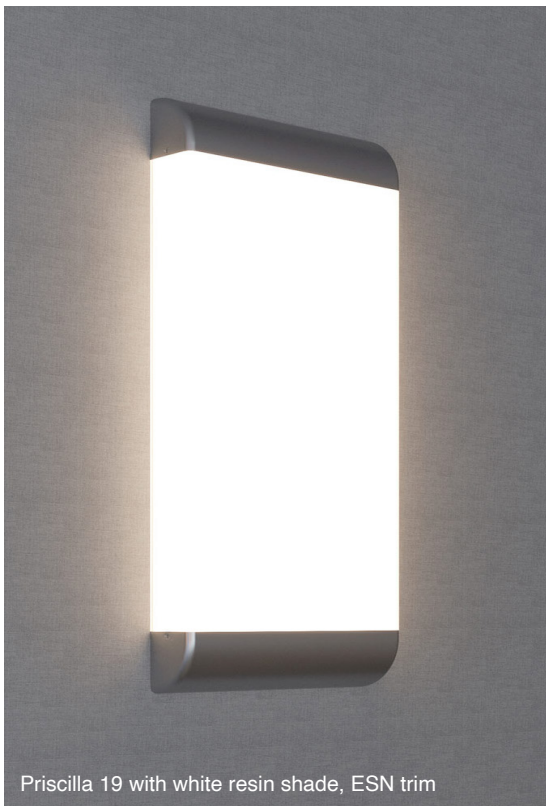

Priscilla 19 with white resin shade, ESN trim



|                                     |  |
|-------------------------------------|--|
| <b>APPLICATIONS</b>                 | <ul style="list-style-type: none"><li>Behavioral Health, Healthcare, Anti-Ligature Applications, Corporate, Retail, Hospitality</li></ul>  |
| <b>SIZES</b>                        | <ul style="list-style-type: none"><li>19" L x 8.5" W x 1.75" D, 5 lbs (approved by Behavior Health)</li><li>35" L x 8.5" W x 1.75" D, 10 lbs</li></ul>   |
| <b>WEIGHT</b>                       | <ul style="list-style-type: none"><li>Priscilla-19, 5.1 pounds</li><li>Priscilla-35, 10.2 pounds</li></ul>   |
| <b>MOUNTING</b>                     | <ul style="list-style-type: none"><li>J-Box 3.0 or 4.0 at center or end of fixture</li><li>Can be mounted horizontally or vertically</li></ul>   |
| <b>TWO DIMMING METHODS INCLUDED</b> | <ul style="list-style-type: none"><li>LUMENSELECT® 4-level light output dial (100%, 75%, 50%, 25%)</li><li>0-10V Dimming (100-10%)</li></ul>   |
| <b>SPECIFICATIONS</b>               | <ul style="list-style-type: none"><li>High efficiency, fully integrated proprietary LED Module</li><li>IK10 UL Certified (protected against 20 joules of impact)</li><li>Title 24 JA8 Certified</li><li>ADA Compliant</li><li>Color Temperature Select (CCT), Integrated four CCT select (2700K, 3000K, 3500K, 4000K). OPTIONAL (specify)</li><li>1.75" projection</li><li>ETL Dry Listed</li><li>120-277V Input</li><li>L90 - 100,000+ hours. 10 years / 24/7</li><li>Optional tamper resistant mounting screws</li><li>10 Year Limited Warranty (excludes shade)</li></ul> |
| <b>LAMPING</b>                      | <ul style="list-style-type: none"><li>2700K, 3000K, 3500K, 4000K CCT</li><li>90 CRI (minimum)</li><li>75W+ equivalent, 19" - 15W</li><li>150W+ equivalent, 35" - 29W</li><li>19" - 525+ lumens delivered with pattern resin shade. 700+ lumens delivered with white resin shade</li><li>35" - 1050+ lumens delivered with pattern resin shade. 1400+ lumens delivered with white resin shade</li></ul>   |
| <b>CONSTRUCTION</b>                 | <ul style="list-style-type: none"><li>Shade: Durable ARCHITECTURAL RESIN by ALVA</li><li>Trim: Architectural grade metal finish. Optional Antimicrobial Finish (must specify)</li></ul>  |

# PRISCILLA


ULTRA LOW PROJECTION LED SURFACE MOUNTED LUMINAIRES  
FOR BEHAVIORAL HEALTH APPLICATIONS

# alva

## LUMENSELECT™

LUMENSELECT™, a dimming control panel on all ALVA luminaires, allows you to customize light output to create the desired atmosphere and to limit the consumption of electricity. The LUMENSELECT™ rotary switch should be turned gently clockwise with a small flathead screwdriver with a 1/8" or 3mm wide tip, one click at a time from factory setting to get desired output level.

LUMENSELECT™ control panel on the end cap of ALVA luminaires:

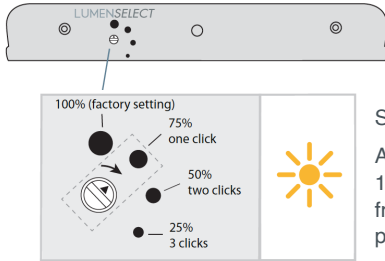


### Setting LUMENSELECT™ Levels

ALVA luminaires come factory set at 100% light output. You may choose from four output settings, typically performed at the time of installation:

- 100% light output & energy consumption
- 75% light output & energy consumption
- 50% light output & energy consumption
- 25% light output & energy consumption


## CCTSELECT

CCTSELECT control panel on the end cap of ALVA luminaires:

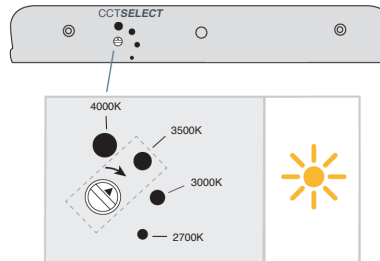

### Setting CCTSELECT Levels

ALVA luminaires come set at your call out in your order. If CCT is not indicated, your module will be set at 3000K by default.



### Remote Dimming Option, 0 - 10V (100 - 10%)

0-10V dimming may be used with compatible dimmer controls

*Please refer to ALVALIGHT.COM for a listing of compatible dimmers*



Priscilla 35 with Island Breeze shade, EOB trim

# PRISCILLA


ULTRA LOW PROJECTION LED SURFACE MOUNTED LUMINAIRES  
FOR BEHAVIORAL HEALTH APPLICATIONS

# alva


|                   |
|-------------------|
| <b>PROJECT:</b>   |
| <b>SPEC TYPE:</b> |
| <b>NOTES:</b>     |

## Resin Shade

19"

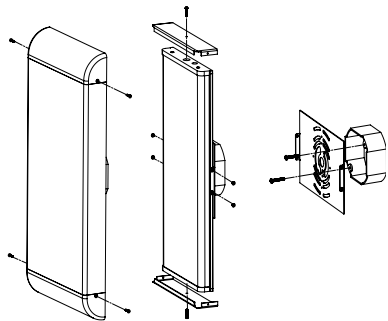

35"

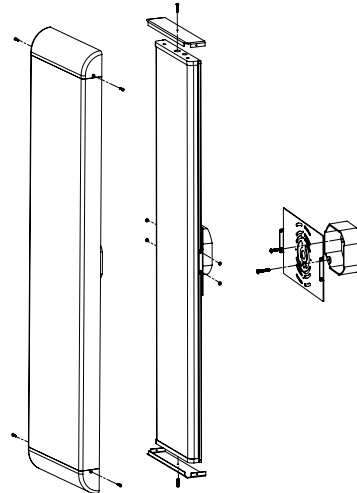

Before installing this light fixture, Please Be Aware of the Following Disclaimers: Installation of these or any other products will NOT eliminate all risks of suicide or injury. ALVA LIGHT does not guarantee or assume any responsibility whatsoever for the performance of any product.

## Metal Trim Powder Coat Trim Options




Enviro Satin Nickel, **ESN**

Enviro Oil-Rubbed Bronze, **EOB**

White, **WHT**

## Vandal Resistant, Architectural Resin Shade Options

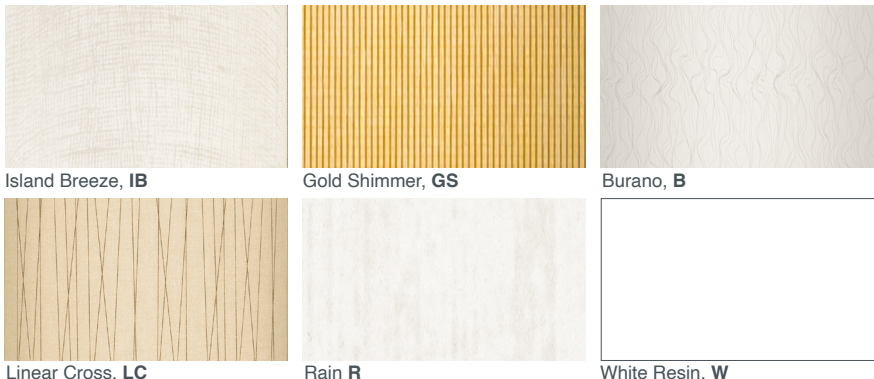

Island Breeze, **IB**

Gold Shimmer, **GS**

Burano, **B**

Faux Alabaster, **FA**

Autumn, **A**

Linear Cross, **LC**

Rain **R**

White Resin, **W**

## ORDER CODE

**MODEL** PRISCILLA

Priscilla

**LENGTH**

19 19"

35 35"

**SHADE MATERIAL** R

R Resin

**SHADE PATTERN**

B Burano

GS Gold Shimmer

IB Island Breeze

A Autumn

LC Linear Cross

R Rain

FA Faux Alabaster

W White Resin

**METAL TRIM POWDER COAT FINISH OPTIONS**

ESN Enviro Satin Nickel

EOB Enviro Oil-Rubbed Bronze

WHT White

**CCT**

2700 2700K

3000 3000K

3500 3500K

4000 4000K

CS CCT Select

**ANTIMICROBIAL FINISH**

AM Antimicrobial Finish

**MOUNTING**

TX Tamper Resistant Mounting Screws

**BEHAVIORAL HEALTH**

BH Behavioral Health (19" only)